

I3C is a new standard from the MIPI Alliance that unifies and extends legacy interfaces of I2C and SPI and adds new powerful features to support modern mobile, automotive, and IOT applications. I3C products from Silvaco provides customers with a range of products that allow customers to take advantage of the higher performance and lower power features that come with I3C.

The I3C Autonomous Slave controller is intended for simple, data acquisition types of applications where a microprocessor is not needed to process the data. Instead, data is exchanged via a simple set of register interfaces to the application and the controller autonomously manages all of the communication to an upstream I3C Master.


APPLICATIONS

- Mechanical sensing (Gyroscopes, MEMS, etc.)
- Environmental sensing (Light, pressure, temperature, humidity, etc.)
- Biometrics (Fingerprinting, glucose, heart rate, breathalyzer, etc.)
- Communication (Near-field sensors, infrared remotes, etc.)

FEATURES

- Highly configurable core that allows customer to minimize unneeded logic
 - Compliant with the latest version of the MIPI I3C specification
 - Legacy I2C coexistence, including I2C messaging
 - Support for I2C pads with 50ns glitch detector
 - Dynamic addressing
 - Multi-drop capability
 - Standard data rate (SDR)
 - Error detection types (S0-S6, M0-M2)
- Advanced I3C features
 - Hot join
 - Status I2C address support (Slave and SDR only Slave)
 - In-band interrupts
 - Asynchronous time stamping (Mode 0)
 - High speed mode (HDR-DDR)
 - Additional CCC's (ENTAS1-2, ENEC/DISEC, SET/GET Max, GETMXDS)
- Low gate count (<2K gates)

BLOCK DIAGRAM

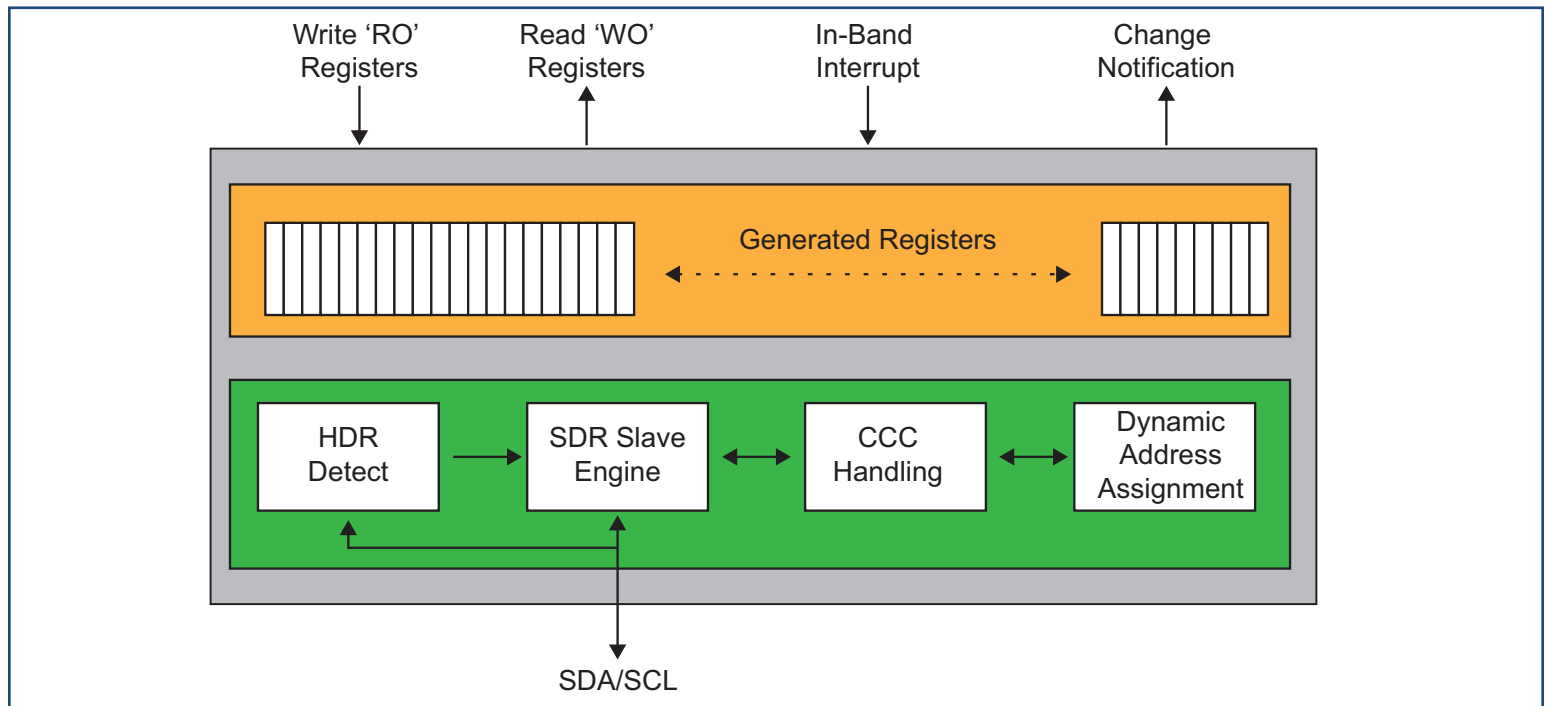

DELIVERABLES

- Verilog RTL source code
 - System Verilog test bench with test suites
 - System Verilog I3C Master bus functional model
 - System Verilog I3C Bus Monitor
- Provided as source code, no additional licenses required
- Master controller (binary) for developing/testing FPGA prototypes
- Documentation including User's Guide and Integration Guide
- Technology-independent synthesis constraints

For more product information, please contact ip@silvaco.com

SILVACO

HEADQUARTERS

2811 Mission College Blvd., 6th Floor
Santa Clara, CA 95054 USA

Phone: 408-567-1000

Fax: 408-496-6080



CALIFORNIA

sales@silvaco.com
408-567-1000

MASSACHUSETTS

masales@silvaco.com
978-323-7901

TEXAS

txsales@silvaco.com
512-418-2929

JAPAN

jpsales@silvaco.com

EUROPE

eusales@silvaco.com

FRANCE

eusales@silvaco.com

KOREA

krsales@silvaco.com

TAIWAN

twsales@silvaco.com

SINGAPORE

sgsales@silvaco.com

CHINA

cnsales@silvaco.com

WWW.SILVACO.COM

Rev 112916_01